

# Data sheet

30.08.2022 MADE WITH VEM EKAT 2022



## Manufacturer

VEM motors GmbH - Werk Zwickau  
Äußere Dresdner Str. 35

08066 ZWICKAU  
Deutschland

## Customer

### Three-phase motors with squirrel cage rotor, Housing grey cast iron

Type	IE3-W41R 90 SY4
Design output	( kW ) 1,1
Design torque	( Nm ) 7,2
Class IE	[ - ] IE3-84,1%
Efficiency determination	EN 60034-2-1
Duty type	S1
Design frequency	( Hz ) 50
Design speed	[rpm] 1450
Voltage	( V ) 230/400
Connection	[ - ] D Y
Current	[ A ] 4.35 2.50
Relative pull-in current	[ - ] 7
Relative starting torque	[ - ] 3,1
Relative pull-up torque	[ - ] 2,9
Relative pull-out torque	[ - ] 3,9
Efficiency 100/75/50 %	[ % ] 84,1 / 84,9 / 82,5
Power factor	[ - ] 0,75
Th. cl.	155(F/B)
Coolant temperature	( °C ) -20°C...+40°C
Altitude above sea level	( m ) 1000m
Degree of protection IP	IP55
Moment of inertia	( kgm² ) 0,004
Motor weight	( kg ) 22,5
Bearing, D-side	6205 2Z C3
Bearing, N-side	6205 2Z C3
Relubrication interval	( h )
Grease type	Asonic GLY 32
Grease amount	[cm³]
A-sound pressure level	( dB ) a.A.

### Options

Type of mounting	IM B3
Flange	-
Terminal box	Standard
Position of terminal box	on the right-hand side
Cable gland	Sealing plug
Position of cable entry	right
Shaft	Standard, 1 shaftend
Bearing	Easy bearing arrangement
Limit values to vibration velocity	Class A
Colour system	Balancing with half key
Delivery conditions and/or official regulations:	01 Moderate (KK C2), RAL 7031 blue-grey IEC / EN 60034-1

This document was produced electronically, all specifications are valid only after confirmation of the manufacturer

# Data sheet


30.08.2022 MADE WITH VEM EKAT 2022



Three-phase motors with squirrel cage rotor,  
Housing grey cast iron

**IE3-W41R 90 SY4**

**Mounting position**



Type of mounting: IM B3

Flange: -



Position of terminal box: on the right-hand side

Brake type:

Forced-ventilation:

Terminal box: KA 05

Cable gland O: 1 xSealing plug

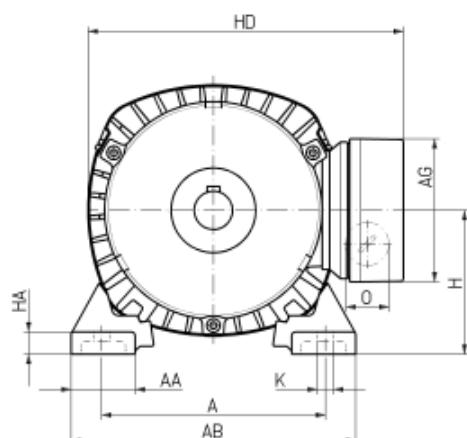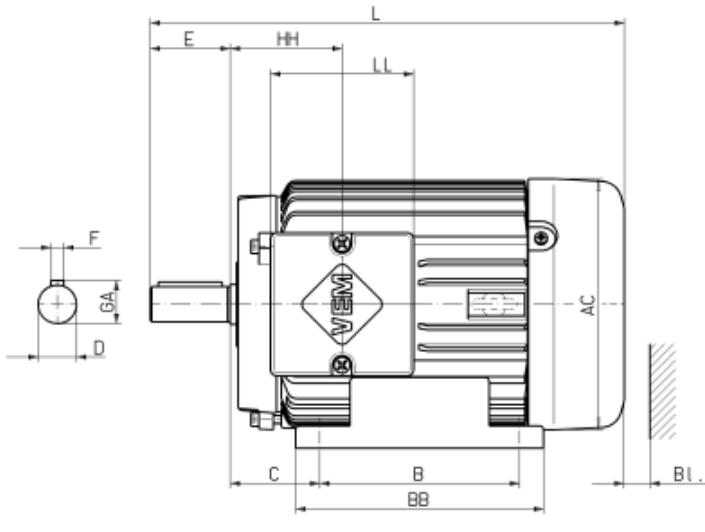

**Motor**

A 140	AA 40	AB 178	AC 177	AD 127	B 100	B' -	BA -	BA' -	BB 130	C 56	CA -	K 10	K' 10
L 321	LC -	H 90	HA 10,5	HD a.A.	HH 75	BI 18			Protection cover L	AG 92	LL 92	BE	AH

**Flange**

P	N	LA	M	T	S	Tolerances	H -0,5	N j6	D k6	DA k6
-	-	-	-	-	-					

**Shaft-DS**

D 24	E 50	GA 27	F 8	DB DIN 332 DS - M8	
---------	---------	----------	--------	-----------------------	--

**Shaft-NS**

DA -	EA -	GC -	FA -
---------	---------	---------	---------

**DB...Centre hole**

Delivery conditions and/or official regulations: IEC / EN 60034-1

This document was produced electronically, all specifications are valid only after confirmation of the manufacturer